

ADHESIVE PRODUCT SPECIFICATION

CJA5003 PUR Hot Melt Adhesive


Application: For assembly applications in the furniture, metal and plastics industries. CJA5003 is a very universal assembly adhesive.

**Characteristics/
Directions for
use:** Long open time and good green strength before curing is achieved. Excellent resistance to heat and solvents.

Tested according to our test methods. Customer trials are recommended.

Processing Temp.: 110-130°C (230-266°F) in the melt

Technical Data: Density (g/ml): approx. 1.1 (9.1 lbs./gal)
Color: natural
NCO content: approx. 2.7%

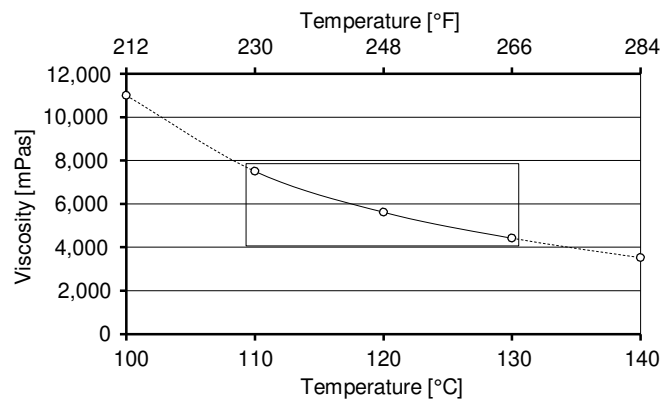

Cleaning: Application equipment needs flushing daily with CJA-PUR Purge Clear to prevent nozzles from clogging overnight.

Storage: May be stored in properly closed original containers, cool and dry (15-25°C (59-77°F)). Best before date, please refer to label on the packaging unit.

Packaging: In moisture-proof sealed containers. Unit size upon request.

Remarks: For further information concerning handling, transport and disposal, please refer to the Material Safety Data Sheet. Our information on this data sheet is based on test results from our laboratories as well as on experience gained in the field by our customers. It can, however, not cover all parameters for each specific application and is therefore not binding for us. The information given in this leaflet represents neither a performance guarantee nor a guarantee of properties, nature, condition, state or quality. No liability may be derived from these indications nor from the recommendations made by our free technical advisory service.

06/15